

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYFTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

Intermediate for strengthening of non-metallic FRP, PBT fiber-circular casing around package, the cable core filled ointment, with water blocking outsourcing, PE layer of protection, and with the strand (or wire) parallel placed at the same time squeeze 8 fonts into a cable sheathing.

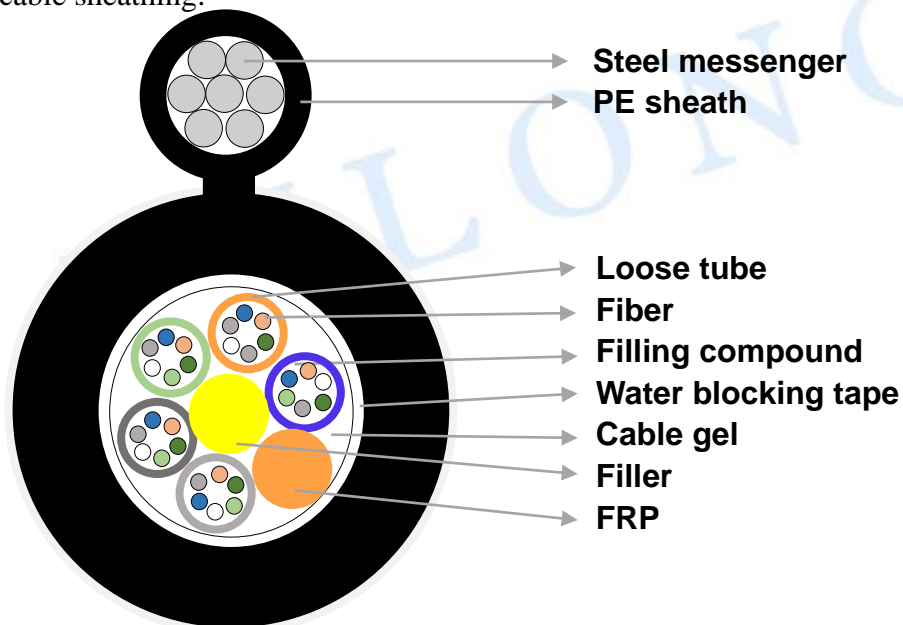

CHARACTERISTICS:

- Water blocking the whole section (except for the portion of the hanging cable), fiber optic cable with excellent mechanical and environmental performance.
- To ensure long-term reliability of fiber optic cable.
- 8 chevron Self-supporting structural design, easy to install installation, reducing installation costs.
- Low loss, low dispersion, all nonmetallic structure of lightning excellent performance.

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYFTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

	GYFTC8Y	GYFTC8Y	GYFTC8Y	GYFTC8Y	GYFTC8Y	GYFTC8Y	GYFTC8Y	GYFTC8Y
Cable Type increased by 2 fibers	4-30 Cores	4-36 Cores	32-60 Cores	32-72 Cores	74-96 Cores	32-60 Cores	32-72 Cores	74-96 Cores
Fiber Count	4-30	4-36	32-60	32-72	74-96	98-120	122-144	146-216
Tubes+Filler	5	6	5	6	8	10	12	6/12
Max No. of fibers in Tube	6	6	12	12	12	12	12	6/12
Cable Diameter(mm)	9.6-	10.2-	10.6-	11-	12.5-	13.8-	15.4-	16-
Cable Weight(kg/km)	135-	145-	150-	155-	170-	190-	250-	250-
Tensile Strength Long/Short Term(N)	2000/5000	2000/5000	2000/5000	2000/5000	2000/5000	2000/5000	2000/5000	2000/5000
Crush Resistance Long/Short Term(N/100mm)	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000