

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYFX

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

The fibers, are positioned in a loose tube made of a high modulus plastic. The tubes are filled with a water-resistant filling compound. Over the tube, water-blocking material is applied to keep the cable watertight. Two parallel Fiber Reinforced Plastics (FRP) are placed at the two side. The cable is completed with a polyethylene (PE) sheath.

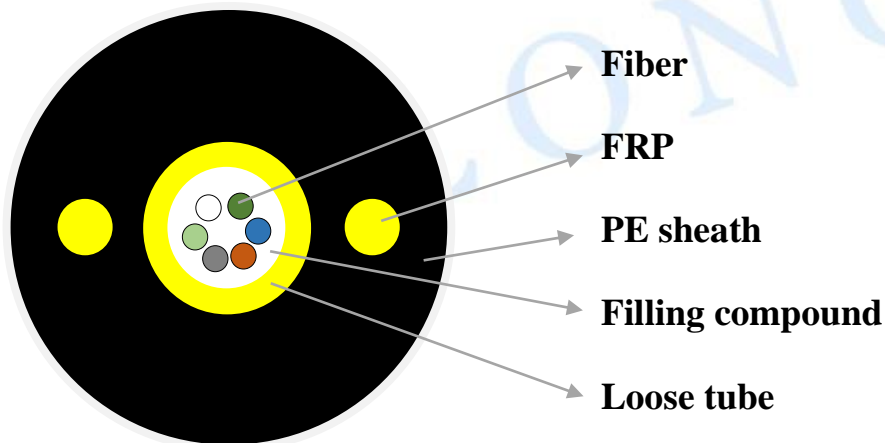

CHARACTERISTICS:

- Good mechanical and temperature performance.
- High strength loose tube that is hydrolysis resistant.
- Special tube filling compound ensure a critical protection of fiber, Specially designed compact structure is good at preventing loose tubes from shrinking.
- Two parallel FRP ensure tensile strength.
- PE sheath protects cable from ultraviolet radiation.
- Small diameter, light weight and friendly installation.

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYFX

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

Cable Type increased by 2 fibers	GYFX-2-12Cores
Fiber Count	2-12
Cable Diameter(mm)	7.6-
Cable Weight(kg/km)	40-
Tensile Strength Long/Short Term(N)	400/1000
Crush Resistance Long/Short Term(N/100mm)	300/1000