

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

Strengthening of the Centre for wire, or fiber loose-tube PBT may have filled rope around the outside package, the cable core filled ointment, with water blocking vertical packages, PE layer of protection, and with the Strand (or wire) parallel placed at the same time squeezing into 8 fonts jacket cable.

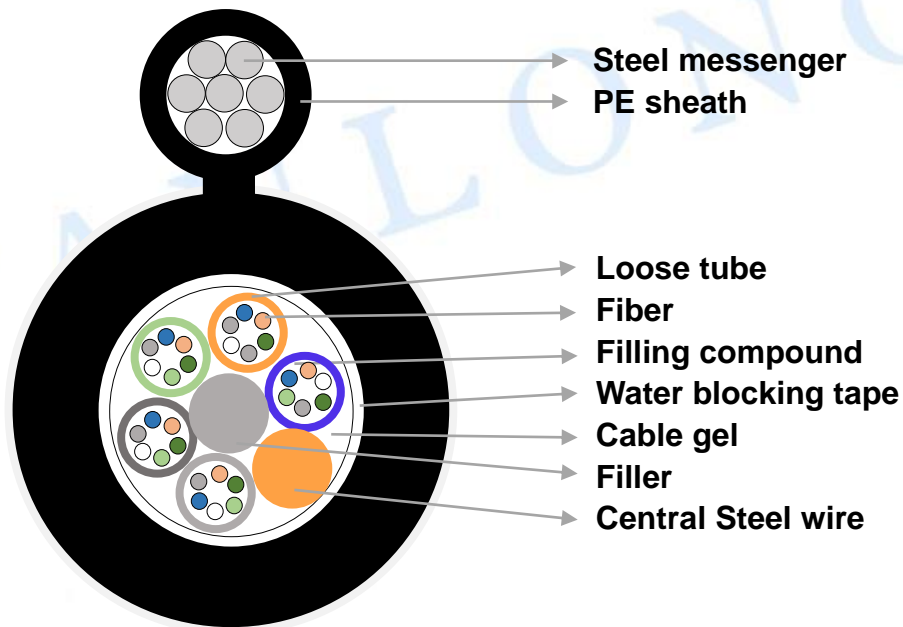

CHARACTERISTICS:

- Core cable filled ointment to ensure that the vertical water blocking effect.
- Loose pieces of casing around the central of the SZ-cutter.
- No need another release strand when set up , the rate of increase of 3-4 times.

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

Cable Type increased by 2 fibers	GYTC8S 4-30 Cores	GYTC8S 4-36 Cores	GYTC8S 32-60 Cores	GYTC8S 32-72 Cores	GYTC8S 74-96 Cores	GYTC8S 32-60 Cores	GYTC8S 32-72 Cores	GYTC8S 74-96 Cores
Fiber Count	4-30	4-36	32-60	32-72	74-96	98-120	122-144	146-216
Tubes+Filler	5	6	5	6	8	10	12	6/12
Max No. of fibers in Tube	6	6	12	12	12	12	12	6/12
Cable Diameter(mm)	9.6-	10.2-	10.6-	11-	12.5-	13.8-	15.4-	16-
Cable Weight(kg/km)	140-	150-	155-	160-	180-	220-	270-	280-
Tensile Strength Long/Short Term(N)	3000/7000	3000/7000	3000/7000	3000/7000	3000/7000	3000/7000	3000/7000	3000/7000
Crush Resistance Long/Short Term(N/100mm)	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000