

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYTY

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

Strengthening of the Centre for wire, or fiber loose tube PBT may have filled rope around the outside package, the cable core filled ointment, with water blocking vertical packages, PE layer of protection.

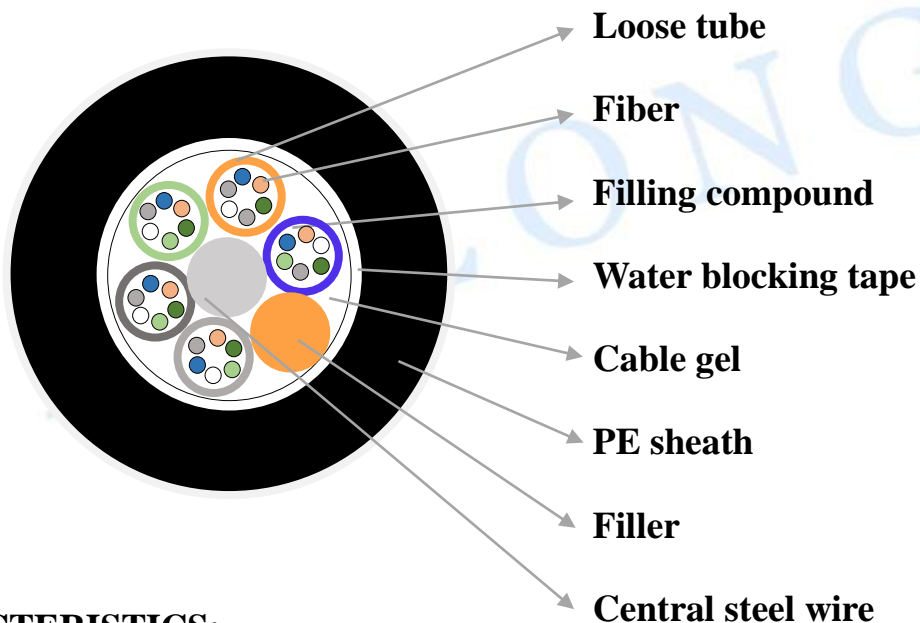

CHARACTERISTICS:

- Reasonable design and precise control over the loose-tube fiber in the remainder of a long, fiber optic cable with excellent performance and temperature tensile properties.
- Core cable filled ointment to ensure that the vertical water blocking effect.
- Loose-tube (filled with rope) to strengthen the focus on the central pieces of SZ-cutter.
- Smooth, cable fiber optic cable installation process can be very small coefficient of friction.
- High strength loose tube that is hydrolysis resistant and special tube filling compound ensure a critical protection of fiber; specially designed compact structure is good at preventing loose tubes from shrinking.
- PE sheath protects cable from ultraviolet radiation.

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYTY

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

Cable Type increased by 2 fibers	GYTY 4-30 Cores	GYTY 4-36 Cores	GYTY 32-60 Cores	GYTY 32-72 Cores	GYTY 74-96 Cores	GYTY 98-120 Cores	GYTY 122-144 Cores	GYTY 146-216 Cores
Fiber Count	4-30	4-36	32-60	32-72	74-96	98-120	122-144	146-216
Tubes+Filler	5	6	5	6	8	10	12	6/12
Max No. of fibers in Tube	6	6	12	12	12	12	12	6/12
Cable Diameter(mm)	9.6-	10.2-	10.6-	11-	12.5-	13.8-	15.4-	16-
Cable Weight (kg/km)	80-	90-	95-	100-	120-	160-	210-	220-
Tensile Strength Long/Short Term(N)	600/1500	600/1500	600/1500	600/1500	600/1500	600/1500	600/1500	600/1500
Crush Resistance Long/Short Term(N/100mm)	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000	300/1000