

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

RG11 F1190BVV

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

COPPER-CLAD STEEL, FPE, BONDED LAMINATED ALUMINUM TAPE, 90% ALUMINUM BRAID, FLAME RETARDANT PVC JACKET

CENTER CONDUCTOR: 1.63 mm COPPER-CLAD STEEL

DIELECTRIC:

GAS EXPANDED POLYETHYLENE

NOMINAL DIAMETER OVER DIELECTRIC: 7.11 mm

SHIELD:

1ST SHIELD: LAMINATED ALUMINUM TAPE BONDED TO THE DIELECTRIC

2nd SHIELD: 168*0.16 mm ALUMINUM BRAID WIRE
90% COVERAGE

JACKET:

FLAME RETARDANT PVC


NOMINAL DIAMETER OVER JACKET: 10.16 mm

NOMINAL JACKET THICKNESS: 1.07 mm

ELECTRICAL PROPERTIES:

IMPEDANCE: 75.0 +/- 3.0 Ohms

VELOCITY OF PROPAGATION: 85.0% NOMINAL

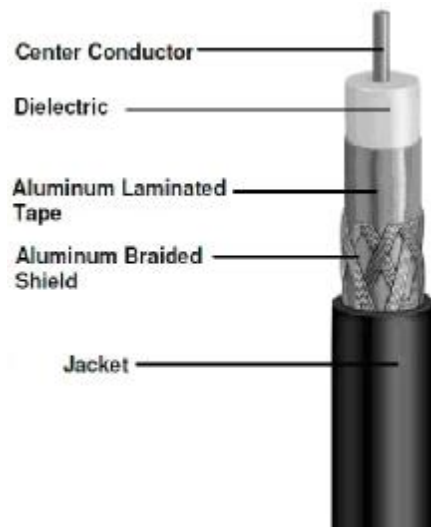

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

RG11 F1190BEF

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

ATTENUATION @ 68°F (20°C):

| @ Frequency MHz | dB/100 ft. (MAX.) | dB/100 meters (MAX.) |
|-----------------|-------------------|----------------------|
| 5 MHz | 0.38 dB | 1.65 dB |
| 55 MHz | 0.96 dB | 3.15 dB |
| 83 MHz | 1.18 dB | 3.87 dB |
| 187 MHz | 1.75 dB | 5.74 dB |
| 211 MHz | 1.90 dB | 6.23 dB |
| 250 MHz | 2.05 dB | 6.72 dB |
| 300 MHz | 2.25 dB | 7.38 dB |
| 350 MHz | 2.42 dB | 7.94 dB |
| 400 MHz | 2.60 dB | 8.53 dB |
| 450 MHz | 2.75 dB | 9.02 dB |
| 500 MHz | 2.90 dB | 9.51 dB |
| 550 MHz | 3.04 dB | 9.97 dB |
| 600 MHz | 3.18 dB | 10.43 dB |
| 750 MHz | 3.65 dB | 11.97 dB |
| 865 MHz | 3.98 dB | 13.05 dB |
| 1000 MHz | 4.35 dB | 14.27 dB |